

EC100

SMART I/O™



DESCRIPTION

The Smart I/O™ EC100 is a fully programmable controller allowing a complete sequence of operation customization for today's ever-changing control strategies that are required to meet continued energy efficiency requirements. The reliable cost effective I/O is continuously monitored and precisely controlled by a microprocessor for exceptional performance. To eliminate memory constraints caused by today's complex applications, as an option, the EC100 can be specified with selectable FLASH/SRAM memory. Communication for monitoring, control and diagnostics is achieved utilizing a LonTalk® TP/FT-10 network with a simple twisted-pair, un-polarized cable. The EC100 can be utilized in many custom or fixed distributed control applications.

The five universal inputs (UI) can be configured in a variety of ways. Universal inputs 1 through 4 (UI1-UI4) can interface with resistive type sensors for temperature measurements. These four inputs can also measure 0-5 volts from typical low output resistance sensors. Universal inputs 1 through 4 are also well suited for reading digital inputs and dry contacts for status or alarm conditions. Universal input 5 (UI5) is specifically set-up to measure only voltage. The default voltage range is 0-5 volts and can be set to measure 0-10 volts with the change of an option jumper. The UI's are well suited to measure voltage values from humidity and many other transducer output signals. With 12-bits of resolution, the universal inputs are field adaptable and accurate for many types of measurements.

The five digital outputs (DO) are Triac outputs for control of additional on/off or pulsed external devices where the current does not exceed 1A at 24 VAC.

The EC100 controller is protected from reverse power supply input wiring, over-voltages, transients, and other common events that can damage unprotected inputs and outputs.

User defined algorithms and functions can be programmed using VisualControl™, NodeBuilder, LonBuilder or other third party LONWORKS programming tools. The application program can be downloaded over the free topology network and is stored in non-volatile memory so it is retained even after loss of power. The versatile I/O allows numerous applications to be development and implemented with the EC100.

The enclosure snaps right onto a 35mm DIN-rail for quick and easy mounting. Its spring-loaded latching mechanism makes it easy to remove.

The wide operating temperature range, -20 to 70 °C, makes the EC100XP well suited for many demanding applications.

APPLICATIONS

- Air Handling Units
- Fan Coil Units
- Roof Top Units
- Heat Pumps
- VAVs
- Chillers
- Boilers
- Lighting
- Energy Management
- Refrigeration
- Custom Applications

FEATURES

- LonTalk Protocol
- Free Topology Communication (FTT-10)
- 5 universal inputs: UI1-UI4 has 0-5V, thermistor or dry contact and UI5 is voltage only with 0-5V or 0-10V
- 5 digital outputs (Triac, 1 A)
- FLASH Memory for Network Downloading of Applications
- 62 programmable network variables with no SNVT type limitations
- Optional selectable memory (Flash, SRAM)
- DIN-rail mounting
- Compact Size for Minimal Panel Space
- Fully programmable
- 2 Year Limited Warranty

SELECTION GUIDE

S-EC100P-F-

B - STANDARD 56K Flash Memory Only

M - Selectable Memory (FLASH, SRAM)

SPECIFICATIONS

General

Communication: LON[™]TALK[™] Protocol
Transceiver: FTT-10, Free Topology
Processor: Neuron 3150 @ 10 MHz
Memory: 56K bytes FLASH
 2K bytes SRAM (Neuron)
 24K bytes SRAM (External)*
 0.5K bytes EEPROM (Neuron)

Inputs

Number: 5
UI1-UI4
Voltage: 0-5 Volts
Thermistor: Type 2, 3: 10Kohms
 (25°C, 77°F)
Digital: Dry Contact
UI5 Only
Voltage: 0-5 Volts,
 0-10 Volts (Option Jumper)

Power

Nominal Input Voltage: 24 VAC
Input Voltage Range: 21-28 VAC
Maximum Consumption: 6 VA, does not include Triac loading

All Inputs

Resolution: 12 bits
Accuracy: ±1% FS (25°C, 77°F)
Protection Circuitry: Transient Voltage, ESD

Environmental

Operating Temperature: -20 °C to +70 °C, -4 °F to 158 °F
Storage Temperature: -40 °C to +70 °C, -40 °F to 158 °F
Relative Humidity: 5% to 95% (non-condensing)

Outputs

Number: 5
5- Digital: Triac 1.0 A @ 24 VAC
 Voltage Sourcing
Protection Circuitry: Transient Voltage, ESD

Warranty


Period: 2 Years (Limited)

Enclosure

Dimensions: L 105 x W 86 x H 58 mm
 (4.13" x 3.39" x 2.28")
Cover: Lexan 940, UL94-V0 rated
Base: Noryl VO1550, UL94-V0 rated

*Optional – Only available on models with "M" option

DIMENSIONS

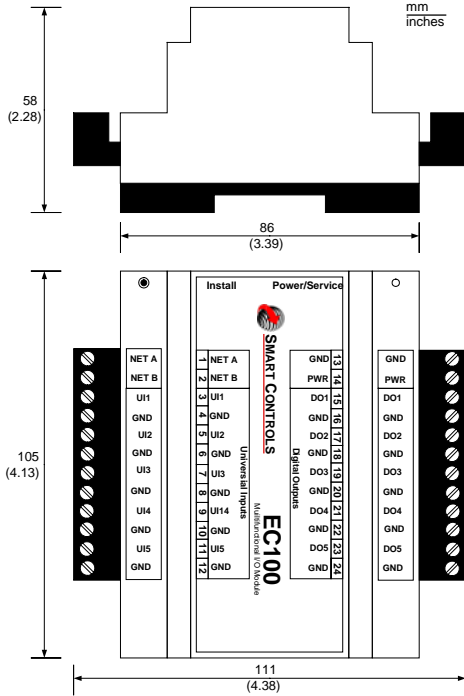

CONTACT



Office:
 10000 St. Clair Avenue
 Fairview Heights, IL 62208
 U.S.A.
 Phone: +1 618 394 0300
 Fax: +1 618 394 1575

E-mail:
sales@smartcontrols.com

Web site:
www.smartcontrols.com

Echelon, LONWORKS, 3150, NEURON AND LONTALK are trademarks or registered trademarks of Echelon Corporation.


Smart I/O and VisualControl are trademarks of Smart Controls, LLC. SMART CONTROLS, LLC reserves the right to make changes without further notice to this product for improvements in design and reliability. SMART CONTROLS, LLC does not assume any liability arising out of the application or use of this product; neither does it convey any license under its patent rights of others.

AGENCY



OPTION JUMPER SELECTIONS

ALL JUMPERS SHOWN IN FACTORY DEFAULT POSITION

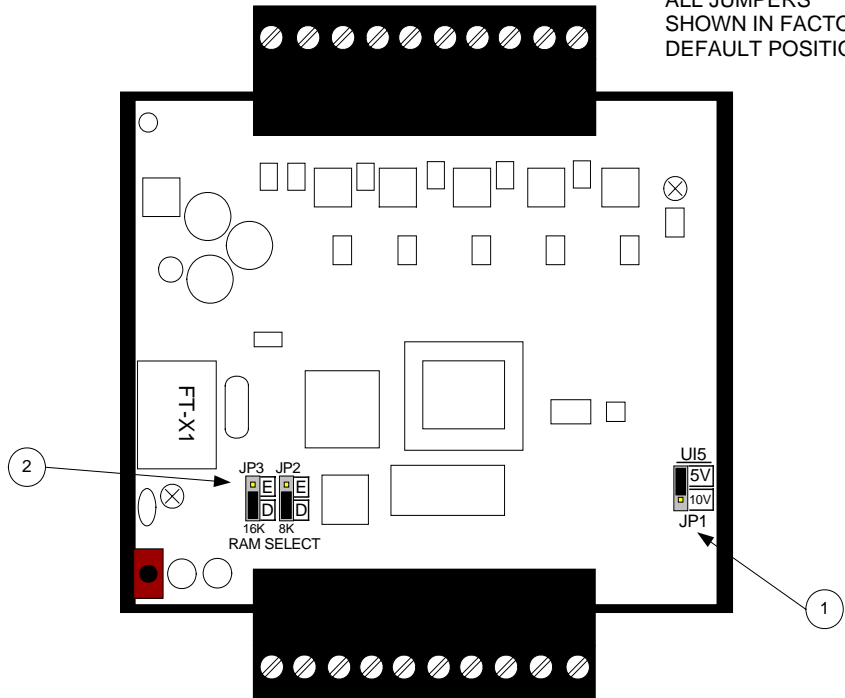

1- 5V/10V Selection

5V – Input Sensing for 5V Signals
10V – Input Sensing for 10V Signals

Note: UI5 only.

2- RAM Memory Selection*

E – Enable
D – Disable
 *Optional – Only available on models with "M" option.

FLASH	RAM	16K(JP3)	8K(JP2)
56K	0K	D	D
48K	8K	D	E
40K	16K	E	D
32K	24K	E	E